



AiP74HC/HCT594

8-bit Shift Register with Output Register

Product Specification

Specification Revision History:

Version	Date	Description
2023-06-A1	2023-06	New



Contents

1、 General Description.....	3
2、 Block Diagram And Pin Description.....	6
2.1、 Block Diagram.....	6
2.2、 Pin Configurations.....	6
2.3、 Pin Description	6
2.4、 Function Table	7
3、 Electrical Parameter	8
3.1、 Absolute Maximum Ratings.....	8
3.2、 Recommended Operating Conditions.....	8
3.3、 Electrical Characteristics	9
3.3.1、 DC Characteristics 1	9
3.3.2、 DC Characteristics 2	10
3.3.3、 AC Characteristics 1	11
3.3.4、 AC Characteristics 2	13
4、 Testing Circuit.....	15
4.1、 AC Testing Circuit.....	15
4.2、 Test Data.....	15
4.3、 AC Testing Waveforms.....	16
4.4、 Measurement Points	19
5、 Package Information.....	20
5.1、 DIP16.....	20
5.2、 SOP16.....	21
5.3、 TSSOP16	22
6、 Statements And Notes.....	23
6.1、 The name and content of Hazardous substances or Elements in the product	23
6.2、 Notes.....	23



1、General Description

The 74HC594/74HCT594 is an 8-bit serial-in/serial or parallel-out shift register with a storage register.

Features:

- Supply voltage range:
AiP74HC594: 2~6V
AiP74HCT594: 4.5~5.5V
- Input levels:
AiP74HC594: CMOS level
AiP74HCT594: TTL level
- Temperature range: -40°C to +125°C
- Packaging information: DIP16/SOP16/TSSOP16

**Ordering Information:****Tube packing specifications:**

Part number	Packaging form	Marking code	Tube quantity	Boxed tube quantity	Boxed quantity	Notes
AiP74HC594 DA16.TB	DIP16	74HC594	25 PCS/tube	40 tube/box	1000 PCS/box	Dimensions of plastic enclosure: 19.0mm×6.4mm Pin spacing: 2.54mm
AiP74HCT594 DA16.TB	DIP16	74HCT594	25 PCS/tube	40 tube/box	1000 PCS/box	Dimensions of plastic enclosure: 19.0mm×6.4mm Pin spacing: 2.54mm
AiP74HC594 SA16.TB	SOP16	74HC594	50 PCS/tube	200 tube/box	10000 PCS/box	Dimensions of plastic enclosure: 10.0mm×3.9mm Pin spacing: 1.27mm
AiP74HCT594 SA16.TB	SOP16	74HCT594	50 PCS/tube	200 tube/box	10000 PCS/box	Dimensions of plastic enclosure: 10.0mm×3.9mm Pin spacing: 1.27mm
AiP74HC594 TA16.TB	TSSOP16	74HC594	96 PCS/tube	200 tube/box	19200 PCS/box	Dimensions of plastic enclosure: 5.0mm×4.4mm Pin spacing: 0.65mm
AiP74HCT594 TA16.TB	TSSOP16	74HCT594	96 PCS/tube	200 tube/box	19200 PCS/box	Dimensions of plastic enclosure: 5.0mm×4.4mm Pin spacing: 0.65mm

**Reel packing specifications:**

Part number	Packaging form	Marking code	Reel quantity	Boxed reel quantity	Notes
AiP74HC594SA16.TR	SOP16	74HC594	4000 PCS/reel	8000 PCS/box	Dimensions of plastic enclosure: 10.0mm×3.9mm Pin spacing:1.27mm
AiP74HCT594SA16.TR	SOP16	74HCT594	4000 PCS/reel	8000 PCS/box	Dimensions of plastic enclosure: 10.0mm×3.9mm Pin spacing:1.27mm
AiP74HC594TA16.TR	TSSOP16	74HC594	5000 PCS/reel	10000 PCS/box	Dimensions of plastic enclosure: 5.0mm×4.4mm Pin spacing:0.65mm
AiP74HCT594TA16.TR	TSSOP16	74HCT594	5000 PCS/reel	10000 PCS/box	Dimensions of plastic enclosure: 5.0mm×4.4mm Pin spacing:0.65mm

Note: If the physical information is inconsistent with the ordering information, please refer to the actual product.



2、Block Diagram And Pin Description

2.1、Block Diagram


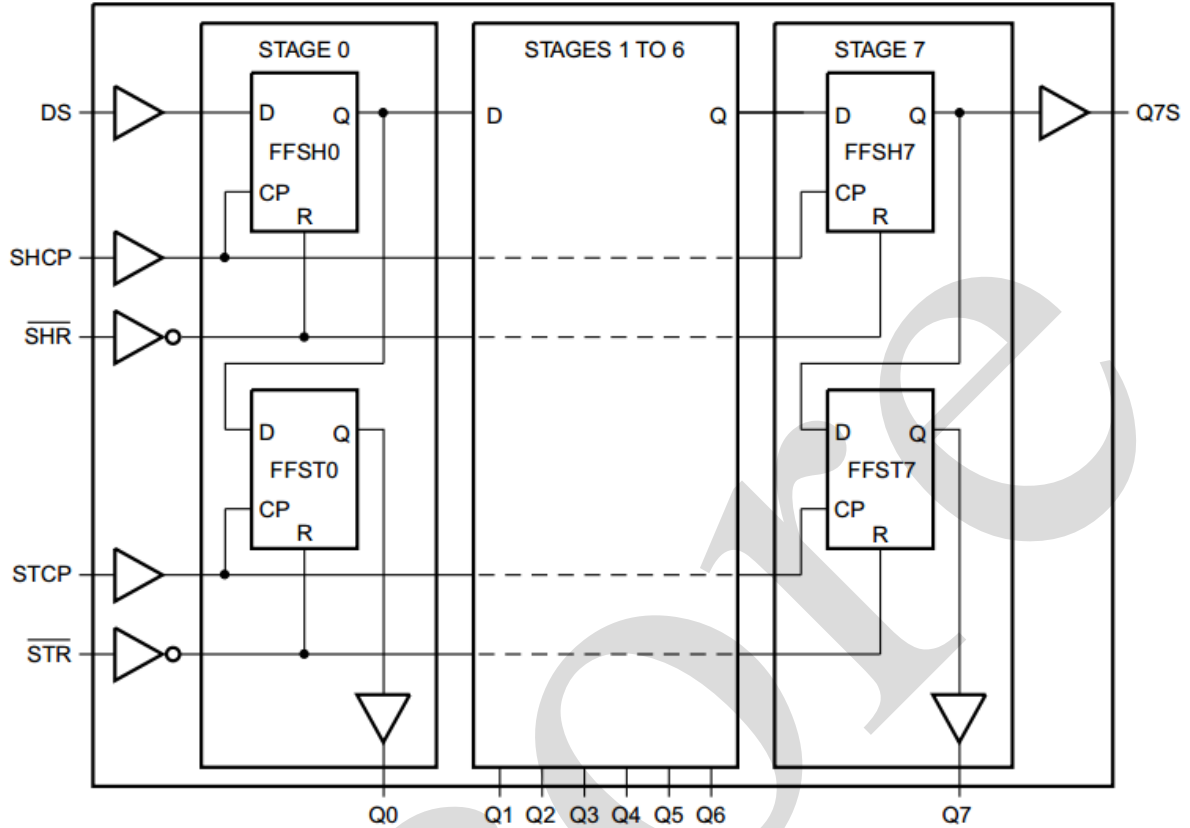


Figure 1. Logic symbol

2.2、Pin Configurations

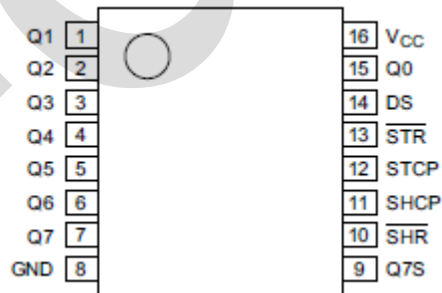

2.3、Pin Description

Pin No.	Pin Name	Description
1	Q1	parallel data output
2	Q2	parallel data output
3	Q3	parallel data output
4	Q4	parallel data output
5	Q5	parallel data output
6	Q6	parallel data output



7	Q7	parallel data output
8	GND	ground (0V)
9	Q7S	serial data output t
10	$\overline{\text{SHR}}$	shift register reset (active LOW)
11	SHCP	shift register clock input
12	STCP	storage register clock input
13	$\overline{\text{STR}}$	storage register reset (active LOW)
14	DS	serial data input
15	Q0	parallel data output
16	V _{CC}	supply voltage

2.4、Function Table

Input					Function
$\overline{\text{SHR}}$	$\overline{\text{STR}}$	SHCP	STCP	DS	
L	X	X	X	X	Clear shift register
X	L	X	X	X	Clear storage register
H	X	↑	X	H or L	Load DS into shift register stage 0, advance previous stage data to the next stage
X	H	X	↑	X	Transfer shift register data to storage register and outputs Q _n
H	H	↑	↑	X	Shift register one count pulse ahead of storage register

Note: H=HIGH voltage level; L=LOW voltage level. ↑=LOW-to-HIGH transition .X= don't care



3、Electrical Parameter

3.1、Absolute Maximum Ratings

(Voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Max.	Unit
supply voltage	V_{CC}	-	-0.5	+7	V
supply current	I_{CC}	-	-	50	mA
ground current	I_{GND}	-	-50	-	mA
input clamping current	I_{IK}	$V_I < -0.5V$ or $V_I > V_{CC}+0.5V$	-	± 20	mA
output clamping current	I_{OK}	$V_O < -0.5V$ or $V_O > V_{CC}+0.5V$	-	± 20	mA
output current	I_O	$-0.5V < V_O < V_{CC}+0.5V$	-	± 25	mA
storage temperature	T_{stg}	-	-65	+150	$^{\circ}C$
soldering temperature	T_L	10s	DIP		$^{\circ}C$
			SOP/TSSOP		

3.2、Recommended Operating Conditions

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
AiP74HC594						
supply voltage	V_{CC}	-	2.0	5.0	6.0	V
input voltage	V_I	-	0	-	V_{CC}	V
output voltage	V_O	-	0	-	V_{CC}	V
ambient temperature	T_{amb}	-	-40	-	+125	$^{\circ}C$
AiP74HCT594						
supply voltage	V_{CC}	-	4.5	5.0	5.5	V
input voltage	V_I	-	0	-	V_{CC}	V
output voltage	V_O	-	0	-	V_{CC}	V
ambient temperature	T_{amb}	-	-40	-	+125	$^{\circ}C$



3.3、Electrical Characteristics

3.3.1、DC Characteristics 1

($T_{amb} = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	V _{CC}	Conditions	Min.	Typ.	Max.	Unit
AiP74HC594							
HIGH-level input voltage	V _{IH}	2.0V	-	1.5	1.2	-	V
		4.5V	-	3.15	2.4	-	V
		6.0V	-	4.2	3.2	-	V
LOW-level input voltage	V _{IL}	2.0V	-	-	0.8	0.5	V
		4.5V	-	-	2.1	1.35	V
		6.0V	-	-	2.8	1.8	V
HIGH-level output voltage	V _{OH}	-	Serial data output Q7S	-	-	-	V
		4.5V	I _O =-4.0mA	3.84	4.32	-	V
		6.0V	I _O =-5.2mA	5.34	5.81	-	V
		-	Parellel data outputs	-	-	-	V
		4.5V	I _O =-6.0mA	3.84	4.32	-	V
		6.0V	I _O =-7.8mA	5.34	5.81	-	V
LOW-level output voltage	V _{OL}	-	Serial data output Q7S	-	-	-	V
		4.5V	I _O =4.0mA	-	0.15	0.33	V
		6.0V	I _O =5.2mA	-	0.16	0.33	V
		-	Parellel data outputs	-	-	-	V
		4.5V	I _O =6.0mA	-	0.15	0.33	V
		6.0V	I _O =7.8mA	-	0.16	0.33	V
input leakage current	I _I	6.0V	V _I =V _{CC} or GND	-	-	±2	uA
supply current	I _{CC}	6.0V	V _I =V _{CC} or GND; I _O =0A	-	-	80	uA
AiP74HCT594							
HIGH-level input voltage	V _{IH}	4.5~5.5V	-	2.0	1.6	-	V
LOW-level input voltage	V _{IL}	4.5~5.5V	-	-	1.2	0.8	V
HIGH-level output voltage	V _{OH}	4.5V	Serial data output Q7S	-	-	-	V
			I _O =-4.0mA	3.84	4.32	-	V
		4.5V	Parellel data outputs	-	-	-	V
			I _O =-6.0mA	3.84	4.32	-	V
LOW-level output voltage	V _{OL}	4.5V	Serial data output Q7S	-	-	-	V
			I _O =4.0mA	-	0.15	0.33	V
		4.5V	Parellel data outputs	-	-	-	V
			I _O =6.0mA	-	0.16	0.33	V
input leakage current	I _I	5.5V	V _I =V _{CC} or GND	-	-	±2	uA
supply current	I _{CC}	6.0V	V _I =V _{CC} or GND; I _O =0A	-	-	80	uA
additional supply current	ΔI _{CC}	4.5~5.5V	One input at V _I =V _{CC} -2.1V; Other inputs at V _{CC} or GND; I _O =0A	-	-	135	uA



3.3.2、DC Characteristics 2

($T_{amb} = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	V _{CC}	Conditions	Min.	Typ.	Max.	Unit
AiP74HC594							
HIGH-level input voltage	V _{IH}	2.0V	-	1.5	-	-	V
		4.5V	-	3.15	-	-	V
		6.0V	-	4.2	-	-	V
LOW-level input voltage	V _{IL}	2.0V	-	-	-	0.5	V
		4.5V	-	-	-	1.35	V
		6.0V	-	-	-	1.8	V
HIGH-level output voltage	V _{OH}		Serial data output Q7S	-	-	-	V
		4.5V	I _O =-4.0mA	3.7	-	-	V
		6.0V	I _O =-5.2mA	5.2	-	-	V
			Parellel data outputs	-	-	-	V
		4.5V	I _O =-6.0mA	3.7	-	-	V
		6.0V	I _O =-7.8mA	5.2	-	-	V
LOW-level output voltage	V _{OL}		Serial data output Q7S	-	-	-	V
		4.5V	I _O =4.0mA	-	-	0.4	V
		6.0V	I _O =5.2mA	-	-	0.4	V
			Parellel data outputs	-	-	-	V
		4.5V	I _O =6.0mA	-	-	0.4	V
		6.0V	I _O =7.8mA	-	-	0.4	V
input leakage current	I _I	6.0V	V _I =V _{CC} or GND	-	-	±4	uA
supply current	I _{CC}	6.0V	V _I =V _{CC} or GND; I _O =0A	-	-	160	uA
AiP74HCT594							
HIGH-level input voltage	V _{IH}	4.5~5.5V	-	2.0	-	-	V
LOW-level input voltage	V _{IL}	4.5~5.5V	-	-	-	0.8	V
HIGH-level output voltage	V _{OH}		Serial data output Q7S	-	-	-	-
		4.5V	I _O =-4.0mA	3.7	-	-	V
			Parellel data outputs	-	-	-	-
		4.5V	I _O =-6.0mA	3.7	-	-	V
LOW-level output voltage	V _{OL}		Serial data output Q7S	-	-	-	-
		4.5V	I _O =4.0mA	-	-	0.4	V
			Parellel data outputs	-	-	-	-
		4.5V	I _O =6.0mA	-	-	0.4	V
input leakage current	I _I	5.5V	V _I =V _{CC} or GND	-	-	±4	uA
supply current	I _{CC}	6.0V	V _I =V _{CC} or GND; I _O =0A	-	-	160	uA
additional supply current	ΔI _{CC}	4.5~5.5V	One input at V _I =V _{CC} -2.1V; Other inputs at V _{CC} or GND; I _O =0A	-	-	147	uA



3.3.3、AC Characteristics 1

($T_{amb} = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	V _{CC}	Conditions	Min.	Typ.	Max.	Unit	
AiP74HC594								
SHCP to Q7S propagation delay	t _{PLH} , t _{PHL}	2.0V	C _L =50pF	see Figure 5	-	44	185	ns
		4.5V	C _L =50pF		-	16	37	ns
		5.0V	C _L =15pF		-	13	-	ns
		6.0V	C _L =50pF		-	14	31	ns
STCP to Qn propagation delay		2.0V	C _L =50pF	see Figure 6	-	44	185	ns
		4.5V	C _L =50pF		-	16	37	ns
		5.0V	C _L =15pF		-	13	-	ns
		6.0V	C _L =50pF		-	14	31	ns
SHR to Q7S HIGH to LOW propagation delay	t _{PHL}	2.0V	C _L =50pF	see Figure 9	-	39	185	ns
		4.5V	C _L =50pF		-	14	37	ns
		5.0V	C _L =15pF		-	11	-	ns
		6.0V	C _L =50pF		-	12	31	ns
STR to Qn HIGH to LOW propagation delay		2.0V	C _L =50pF	see Figure 10	-	39	155	ns
		4.5V	C _L =50pF		-	14	31	ns
		5.0V	C _L =15pF		-	11	-	ns
		6.0V	C _L =50pF		-	12	26	ns
Q7S transition time	t _{THL} , t _{TLH}	2.0V	C _L =50pF	see Figure 5	-	19	95	ns
		4.5V	C _L =50pF		-	7	19	ns
		6.0V	C _L =50pF		-	6	16	ns
Qn transition time		2.0V	C _L =50pF		-	14	75	ns
		4.5V	C _L =50pF		-	5	15	ns
		6.0V	C _L =50pF		-	4	13	ns
SHCP(HIGH or LOW) pulse width	t _w	2.0V	C _L =50pF	see Figure 5	100	10	-	ns
		4.5V	C _L =50pF		20	4	-	ns
		6.0V	C _L =50pF		17	3	-	ns
STCP(HIGH or LOW) pulse width		2.0V	C _L =50pF	see Figure 6	100	10	-	ns
		4.5V	C _L =50pF		20	4	-	ns
		6.0V	C _L =50pF		17	3	-	ns
SHR and STR (HIGH or LOW)		2.0V	C _L =50pF	see Figure 9 and Figure 10	100	14	-	ns
		4.5V	C _L =50pF		20	5	-	ns
		6.0V	C _L =50pF		17	4	-	ns
DS to SHCP set_up time	t _{su}	2.0V	C _L =50pF	see Figure 7	125	10	-	ns
		4.5V	C _L =50pF		25	4	-	ns
		6.0V	C _L =50pF		21	3	-	ns
SHR to STCP set_up time		2.0V	C _L =50pF	see Figure 8	125	14	-	ns
		4.5V	C _L =50pF		25	5	-	ns
		6.0V	C _L =50pF		21	4	-	ns
SHCP to STCP set_up time		2.0V	C _L =50pF	see Figure 6	125	17	-	ns
		4.5V	C _L =50pF		25	6	-	ns
		6.0V	C _L =50pF		21	5	-	ns
DS to SHCP	t _h	2.0V	C _L =50pF	see Figure 7	30	-8	-	ns



hold time		4.5V	$C_L=50pF$		6	-3	-	ns
		6.0V	$C_L=50pF$		5	-2	-	ns
SHR to SHCP STR to STCP recovery time	trec	2.0V	$C_L=50pF$	see Figure 9 and Figure 10	65	-14	-	ns
		4.5V	$C_L=50pF$		13	-5	-	ns
		6.0V	$C_L=50pF$		11	-4	-	ns
maximum frequency	fmax	2.0V	$C_L=50pF$	see Figure 5 and Figure 6	4.8	30	-	MHz
		4.5V	$C_L=50pF$		24	92	-	MHz
		5.0V	$C_L=15pF$		-	100	-	MHz
		6.0V	$C_L=50pF$		28	109	-	MHz
AiP74HCT594								
SHCP to Q7S propagation delay	t_{PLH}, t_{PHL}	4.5V	$C_L=50pF$	see Figure 5	-	18	40	ns
		5.0V	$C_L=15pF$		-	15	-	ns
STCP to Qn propagation delay		4.5V	$C_L=50pF$	see Figure 6	-	18	40	ns
		5.0V	$C_L=15pF$		-	15	-	ns
SHR to Q7S HIGH to LOW propagation delay	t_{PHL}	4.5V	$C_L=50pF$	see Figure 9	-	17	38	ns
		5.0V	$C_L=15pF$		-	14	-	ns
STR to Qn HIGH to LOW propagation delay		4.5V	$C_L=50pF$	see Figure 10	-	17	38	ns
		5.0V	$C_L=15pF$		-	14	-	ns
Q7S transition time	t_{THL}, t_{TLH}	4.5V	$C_L=50pF$	see Figure 5	-	7	19	ns
Qn transition time		4.5V	$C_L=50pF$		-	5	15	ns
SHCP(HIGH or LOW) pulse width	tw	4.5V	$C_L=50pF$	see Figure 5	20	4	-	ns
STCP(HIGH or LOW) pulse width		4.5V	$C_L=50pF$	see Figure 6	20	4	-	ns
SHR and STR (HIGH OR LOW)		4.5V	$C_L=50pF$	see Figure 9 and Figure 10	20	6	-	ns
DS to SHCP Set_up time	tsu	4.5V	$C_L=50pF$	see Figure 7	25	4	-	ns
SHR to STCP Set_up time		4.5V	$C_L=50pF$	see Figure 8	25	6	-	ns
SHCP to STCP Set_up time		4.5V	$C_L=50pF$	see Figure 6	25	7	-	ns
DS to SHCP hold time	th	4.5V	$C_L=50pF$	see Figure 7	6	-3	-	ns
SHR to SHCP STR to STCP recovery time	trec	4.5V	$C_L=50pF$	see Figure 9 and Figure 10	13	-5	-	ns
maximum frequency	fmax	4.5V	$C_L=15pF$	see Figure 5 and Figure 6	24	92	-	MHz



3.3.4、AC Characteristics 2

($T_{amb} = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	V _{CC}	Conditions	Min.	Typ.	Max.	Unit		
AiP74HC594									
SHCP to Q7S propagation delay	t _{PLH} , t _{PHL}	2.0V	C _L =50pF	see Figure 5	-	-	225	ns	
		4.5V	C _L =50pF		-	-	45	ns	
		6.0V	C _L =50pF		-	-	38	ns	
STCP to Qn propagation delay		see Figure 6	2.0V	C _L =50pF	-	-	225	ns	
			4.5V	C _L =50pF	-	-	45	ns	
			6.0V	C _L =50pF	-	-	38	ns	
SHR to Q7S HIGH to LOW propagation delay	t _{PHL}	2.0V	C _L =50pF	see Figure 9	-	-	225	ns	
		4.5V	C _L =50pF		-	-	45	ns	
		6.0V	C _L =50pF		-	-	38	ns	
STR to Qn HIGH to LOW propagation delay		see Figure 10	2.0V	C _L =50pF	-	-	185	ns	
			4.5V	C _L =50pF	-	-	37	ns	
			6.0V	C _L =50pF	-	-	31	ns	
Q7S transition time	t _{THL} , t _{TLH}	2.0V	C _L =50pF	see Figure 5	-	-	110	ns	
		4.5V	C _L =50pF		-	-	22	ns	
		6.0V	C _L =50pF		-	-	19	ns	
Qn transition time		see Figure 5	2.0V		C _L =50pF	-	-	90	ns
			4.5V		C _L =50pF	-	-	18	ns
			6.0V		C _L =50pF	-	-	15	ns
SHCP(HIGH or LOW) pulse width	tw	2.0V	C _L =50pF	see Figure 5	120	-	-	ns	
		4.5V	C _L =50pF		24	-	-	ns	
		6.0V	C _L =50pF		20	-	-	ns	
STCP(HIGH or LOW) pulse width		see Figure 6	2.0V	C _L =50pF	120	-	-	ns	
			4.5V	C _L =50pF	24	-	-	ns	
			6.0V	C _L =50pF	20	-	-	ns	
SHR and STR (HIGH OR LOW)	see Figure 9 and Figure 10	2.0V	C _L =50pF	120	-	-	ns		
		4.5V	C _L =50pF	24	-	-	ns		
		6.0V	C _L =50pF	20	-	-	ns		
DS to SHCP set_up time	tsu	2.0V	C _L =50pF	see Figure 7	150	-	-	ns	
		4.5V	C _L =50pF		30	-	-	ns	
		6.0V	C _L =50pF		26	-	-	ns	
SHR to STCP set_up time		see Figure 8	2.0V	C _L =50pF	150	-	-	ns	
			4.5V	C _L =50pF	30	-	-	ns	
			6.0V	C _L =50pF	26	-	-	ns	
SHCP to STCP set_up time	see Figure 7	2.0V	C _L =50pF	150	-	-	ns		
		4.5V	C _L =50pF	30	-	-	ns		
		6.0V	C _L =50pF	26	-	-	ns		
DS to SHCP hold time	th	2.0V	C _L =50pF	see Figure 7	35	-	-	ns	
		4.5V	C _L =50pF		7	-	-	ns	
		6.0V	C _L =50pF		6	-	-	ns	
SHR to SHCP	trec	2.0V	C _L =50pF	see Figure 9	75	-	-	ns	



STR to STCP recovery time		4.5V	C _L =50pF	and Figure 10	15	-	-	ns
		6.0V	C _L =50pF		13	-	-	ns
maximum frequency	f _{max}	2.0V	C _L =50pF	see Figure 5 and Figure 6	4	-	-	MHz
		4.5V	C _L =50pF		20	-	-	MHz
		6.0V	C _L =50pF		24	-	-	MHz
AiP74HCT594								
SHCP to Q7S propagation delay	t _{PLH} , t _{PHL}	4.5V	C _L =50pF	see Figure 5	-	-	48	ns
STCP to Qn propagation delay		4.5V	C _L =50pF	see Figure 6	-	-	48	ns
SHR to Q7S HIGH to LOW propagation delay	t _{PHL}	4.5V	C _L =50pF	see Figure 9	-	-	45	ns
STR to Qn HIGH to LOW propagation delay		4.5V	C _L =50pF	see Figure 10	-	-	45	ns
Q7S transition time	t _{THL} , t _{TLH}	4.5V	C _L =50pF	see Figure 5	-	-	22	ns
Qn transition time		4.5V	C _L =50pF		-	-	18	ns
SHCP(HIGH or LOW) pulse width	t _w	4.5V	C _L =50pF	see Figure 5	24	-	-	ns
STCP(HIGH or LOW) pulse width		4.5V	C _L =50pF	see Figure 6	24	-	-	ns
SHR and STR (HIGH or LOW)		4.5V	C _L =50pF	see Figure 9 and Figure 10	24	-	-	ns
DS to SHCP Set up time	t _{su}	4.5V	C _L =50pF	see Figure 7	30	-	-	ns
SHR to STCP Set up time		4.5V	C _L =50pF	see Figure 8	30	-	-	ns
SHCP to STCP Set up time		4.5V	C _L =50pF	see Figure 6	30	-	-	ns
DS to SHCP hold time	t _h	4.5V	C _L =50pF	see Figure 7	7	-	-	ns
SHR to SHCP STR to STCP recovery time	t _{rec}	4.5V	C _L =50pF	see Figure 9 and Figure 10	15	-	-	ns
maximum frequency	f _{max}	4.5V	C _L =15pF	see Figure 5 and Figure 6	20	-	-	MHz



4、Testing Circuit

4.1、AC Testing Circuit

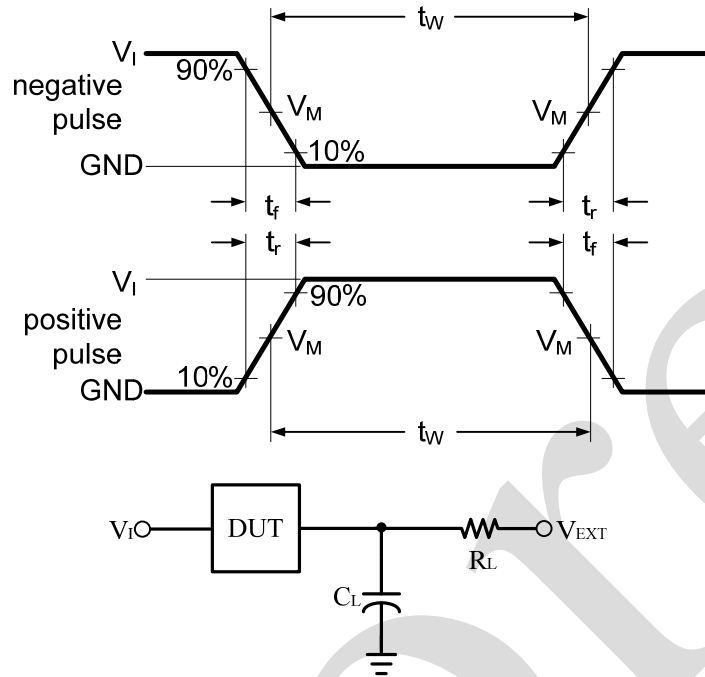


Figure 4. Test circuit for measuring switching times

C_L includes probe and jig capacitance.

4.2、Test Data

Type	Input		Load		V_{EXT}		
	V_I	$t_r = t_f$	C_L	R_L	t_{PLH}/t_{PHL}	t_{PLZ}/t_{PZL}	t_{PHZ}/t_{PZH}
AiP74HC594	V_{CC}	3.0ns	15pF, 50pF	1K Ω	Open	V_{CC}	GND
AiP74HCT594	3.0V	3.0ns	15pF, 50pF	1K Ω	Open	V_{CC}	GND



4.3、AC Testing Waveforms

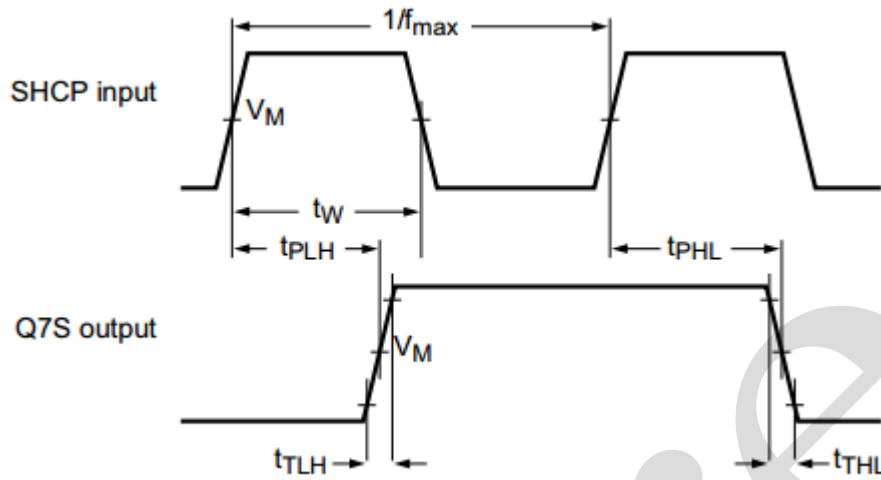


Figure 5. The shift clock (SHCP) to output (Q7S) propagation delays, the shift clock pulse width, the maximum shift clock frequency, and output transition times

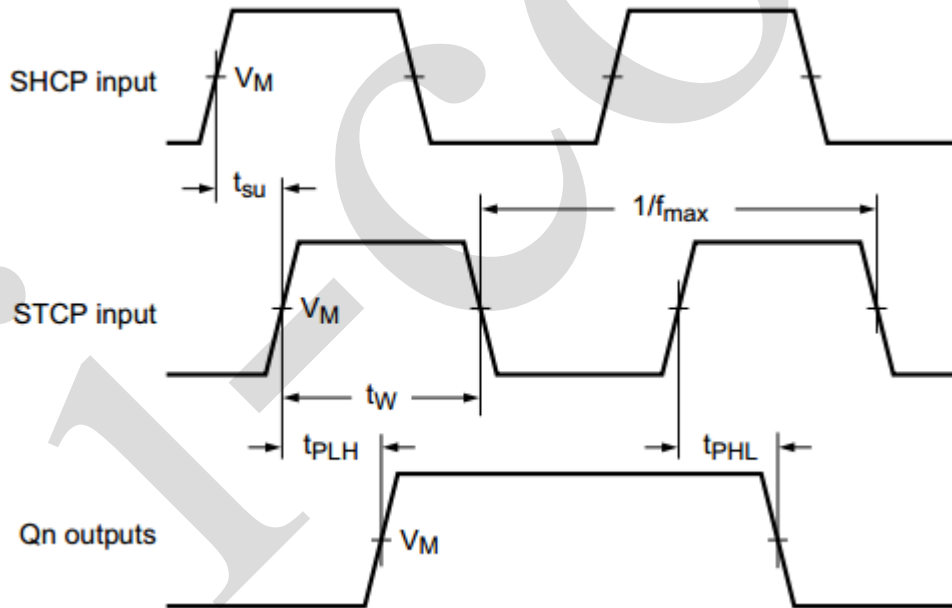


Figure 6. The storage clock (STCP) to output (Qn), propagation delays, the storage clock pulse width, the maximum storage clock pulse frequency and the shift clock to storage clock set-up time

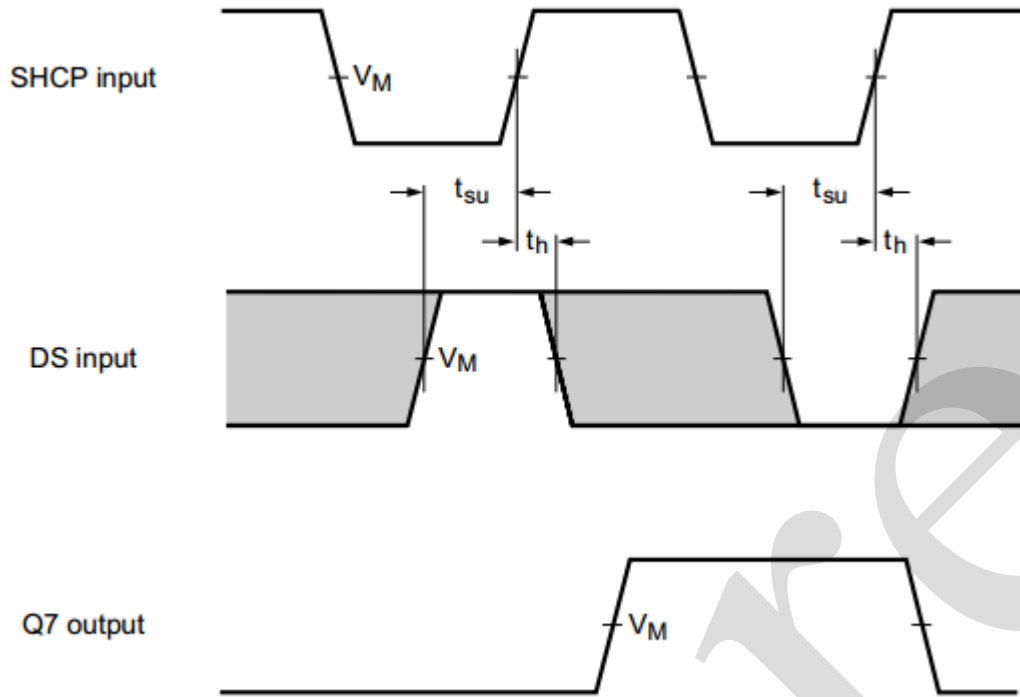


Figure 7. The data set-up time and hold times for DS input to SHCP

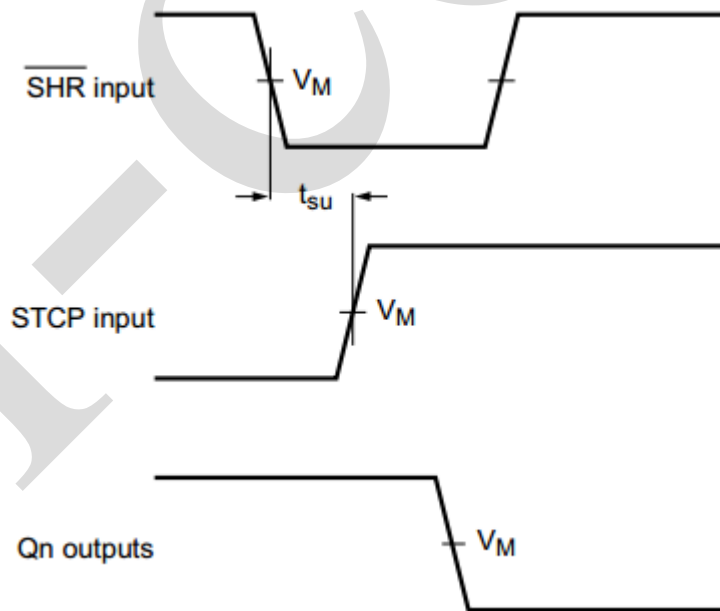


Figure 8 The set-up time shift reset ($\overline{\text{SHR}}$) to storage clock (STCP)

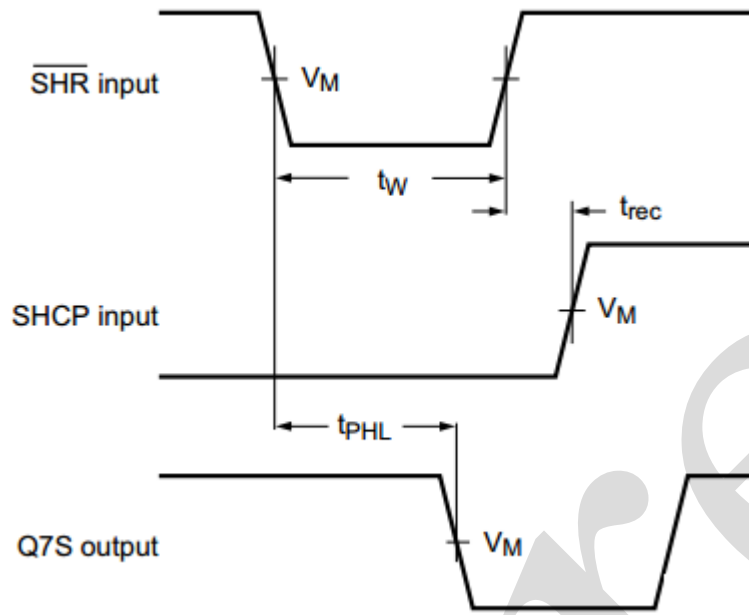


Figure 9 The shift reset ($\overline{\text{SHR}}$) pulse width, the shift reset to output (Q7S) propagation delay and the shift reset to shift clock (SHCP) recovery time


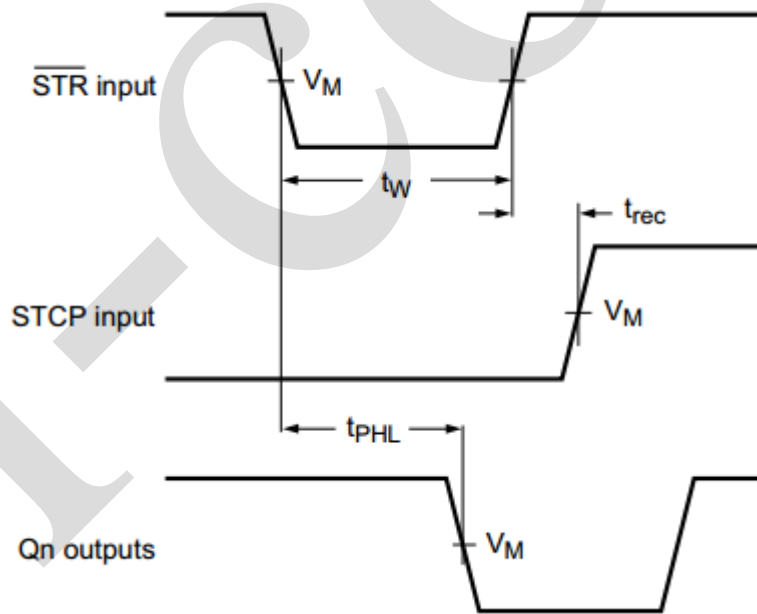


Figure 10 The storage reset ($\overline{\text{STR}}$) pulse width, the storage reset to output (Qn) propagation delay and the storage reset to storage clock (STCP) recovery time



4.4. Measurement Points


Type	Input	Output
	V_M	V_M
AiP74HC594	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$
AiP74HCT594	1.3V	1.3V

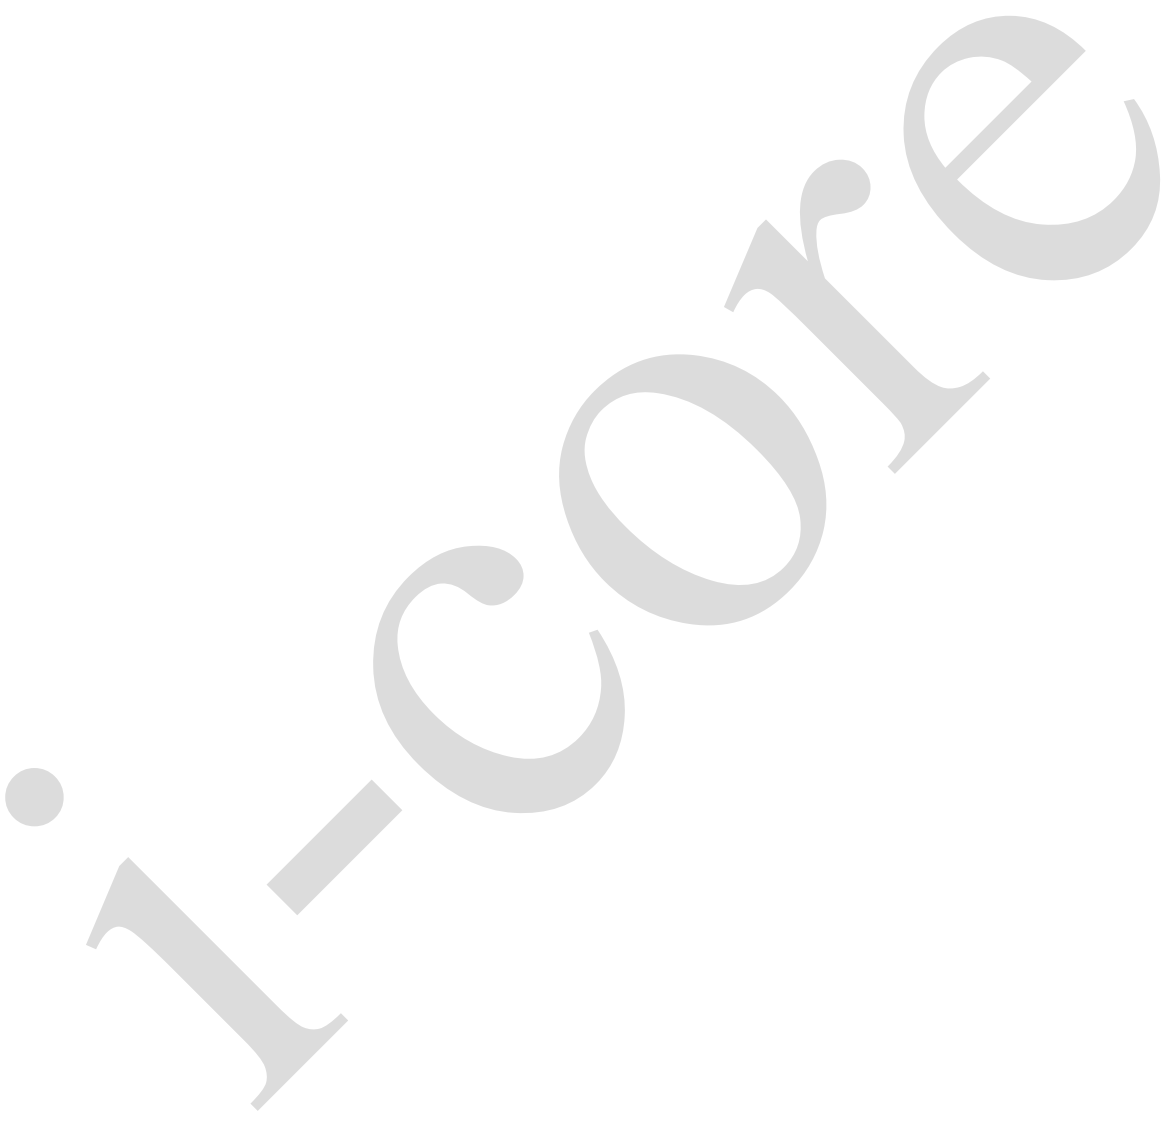



5、Package Information




5.1、DIP16

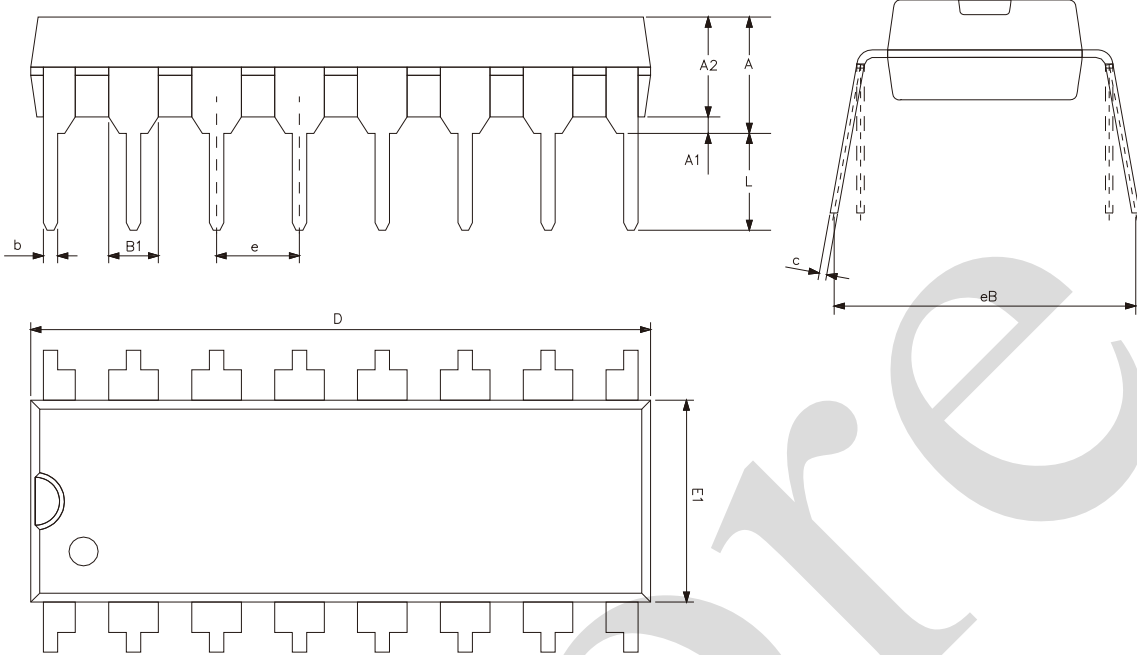

Symbol	Dimensions (mm)	
	Min.	Max.
A2	3.20	3.60
A1	0.51	-
A	3.60	5.33
L	3.00	3.60
b	0.36	0.56
B1	1.52	
D	18.80	19.94
E1	6.20	6.60
e	2.54	
c	0.20	0.36
eB	7.62	9.30






5.2、SOP16

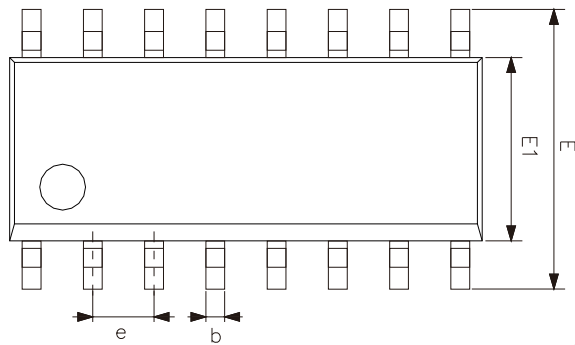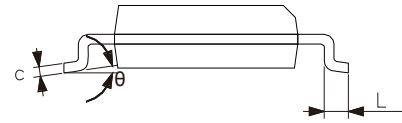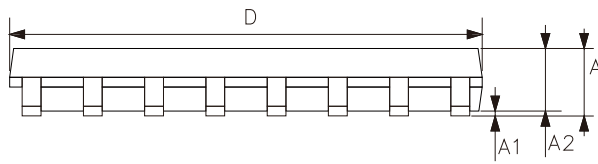

Symbol	Dimensions (mm)	
	Min.	Max.
A	1.35	1.80
A1	0.10	0.25
A2	1.25	1.55
b	0.33	0.51
c	0.19	0.25
D	9.50	10.10
E	5.80	6.30
E1	3.70	4.10
e	1.27	
L	0.35	0.89
θ	0°	8°



5.3、TSSOP16

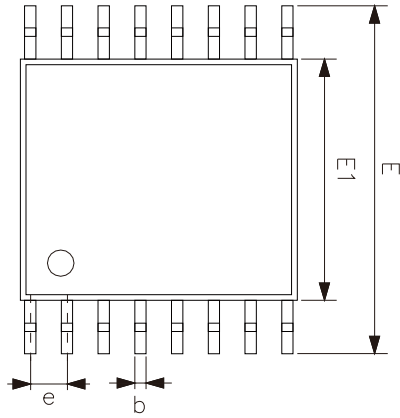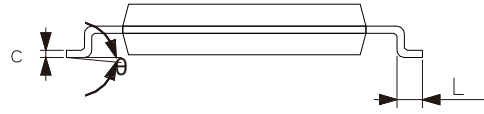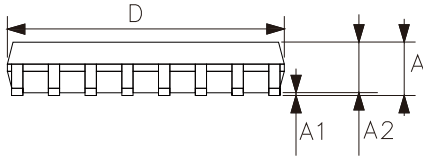

Symbol	Dimensions (mm)	
	Min.	Max.
A	-	1.20
A1	0.05	0.15
A2	0.80	1.05
b	0.19	0.30
c	0.09	0.20
D	4.90	5.10
E1	4.30	4.50
E	6.20	6.60
e	0.65	
L	0.45	0.75
θ	0°	8°



6、 Statements And Notes

6.1、 The name and content of Hazardous substances or Elements in the product

Part name	Hazardous substances or Elements									
	Lead and lead compounds	Mercury and mercury compounds	Cadmium and cadmium compounds	Hexavalent chromium compounds	Polybrominated biphenyls	Polybrominated biphenyl ethers	Dibutyl phthalate	Butylbenzyl phthalate	Di-2-ethylhexyl phthalate	Diisobutyl phthalate
Lead frame	○	○	○	○	○	○	○	○	○	○
Plastic resin	○	○	○	○	○	○	○	○	○	○
Chip	○	○	○	○	○	○	○	○	○	○
The lead	○	○	○	○	○	○	○	○	○	○
Plastic sheet installed	○	○	○	○	○	○	○	○	○	○
explanation	○: Indicates that the content of hazardous substances or elements in the detection limit of the following the SJ/T11363-2006 standard. ×: Indicates that the content of hazardous substances or elements exceeding the SJ/T11363-2006 Standard limit requirements.									

6.2、 Notes

Recommended carefully reading this information before the use of this product;

The information in this document are subject to change without notice;

This information is using to the reference only, the company is not responsible for any loss;

The company is not responsible for the any infringement of the third party patents or other rights of the responsibility.